

# Dual Mode Multimedia Keyboard Touchpad Combo K06 Installation & User Manual



FC CE RoHS UK

Made In China

VER: 1.2

M/C: 06306207009


IN LINE WITH THE POLICY OF CONTINUED DEVELOPMENT THE MANUFACTURER RESERVES THE RIGHT TO AMEND THE SPECIFICATIONS WITHOUT PRIOR NOTIFICATION, THE PICTURES AND DATE IN THE STYLEBOOK ARE CONSULT ONLY, IF THERE IS FLUCTUATION, ACCORDING TO THE REAL OBJECT PLEASE.

## System Requirements

- HID compatible device
- Terminal with USB port
- Windows 2000
- Windows XP
- Windows Vista
- Windows CE
- Windows 7
- Windows 8
- Bluetooth: Windows 8 or more
- Linux (Debian-3, Redhat-9.0, Ubuntu-8.10, Fedora-7.0 tested).

## Descriptions



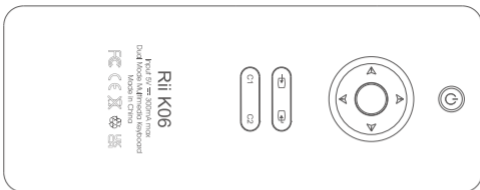

## Specifications

Transmission mode: Bluetooth+(RF)2.4GHz wireless technology

Bluetooth version: Bluetooth 5.0

Power supply: 400mAh

Charging voltage: 5V

Charging current: 300mA

Sleeping current: 12uA

Operation voltage: 3.7v

Operating current: 50mA

Product weight: 98g

Products size: 151\*59\*11mm

## Bluetooth-Installation

- 1 Press the FN+Tab and switch to Bluetooth mode.  
A blue LED will stay on, that means the keyboard has paired with your device.



- 2 To pair a bluetooth device, long press Fn+Pairing for one seconds and wait the blue light to fast flash.



## 2.4G-Installation

- 1 Take out of the receiver from the box.
- 2 Plug the USB Receiver into your device's USB port.




- 3 Press the FN+Caps key and switch to 2.4g mode.

The green indicator light is on to indicate successful connection.



## How to make IR programming

- 1 Aim the Rii Remote IR LED at Your Remote IR LED in alignment as the following figure (PS: the relative distance no more than 3cm).
- 2 Long press the Rii Remote button until the LED Indicator Circle keeps lighting ,it means that the Rii Remote under IR learning state.

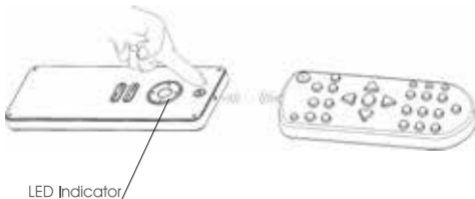

- 3 Press Your Remote button 1 time ,when the LED Indicator Circle flash 2 times and off ,it means that the IR learning process been finished.



- 4 Repeat the step 2-3, until finish learning all keys.

## Note

1. If the Green LED does not stay on and it keeps flashing it means the keyboard was not be paired with your device. As for how to pair, please try following.

### Steps:

Step 1: To switch to 2.4G model and the Green LED light up.

Step 2: Long press Fn+Pairing for one seconds wait and the Green LED will fast flash.

Step 3: Plug in the USB dongle the flashing Green LED will become solid on once paired with success within 60 seconds if it fails for the first time, you can repeat Step 1-2 again. Please make sure the keyboard is fully charged before pairing.

## 2. LED indicator



① Blue/Green - LED

② Red - LED

③ Yellow - LED

④ White - LED

### ① Blue/Green - LED

Blue light is bluetooth mode while green light is 2.4g mode.

When the keyboard is not connected to the device, the indicator light flashes slowly.

### ② Red - LED

Charging status. It is on when charging. After fully charged, it will be off.

### ③ Yellow - LED

















When the battery power is low, the LED will flash.

### ④ White - LED

Caps LED indicator.

3. About signal interference: when working with android TV box or smart TV, big monitor device may have some signal interference. Signal interference may result in short distance and buttons do not work as well. In this case you can try to move the receiver from back of your device to the front USB port then re-pair and use this keyboard.

#### 4. Shortcut Keys:

	Music Player		Mute		VOL-		VOL+
	Pre		Pause		Next		Backlight
	Home		Return		Menu		Search
	Email		Calculator		Lock screen	Insert	Switch input mode
PrtSc	Printscreen	Del	Delete	BT	Bluetooth mode	2.4G	2.4G mode
Pairing	Bluetooth pairing	CTRL+ALT+DEL	Task manager		90-degree flip	DPI	Adjust speed
Pu	Pege Up	Pd	Pege Down				

#### 5. Auto Sleep Mode

This keyboard has auto sleep / wake up function. when there is no any operation in 5 minutes, it will into sleep automatically. Press any button to wake it up. Make sure it is on enough power.

#### Auto Sleep and Wake-up feature

The keyboard supports auto sleep and wake-up. Without operation around 3 minutes, the keyboard will enter sleep mode. In sleep status, all LED indicators are off. Pressing any key can wake it up.

## Switching off the keyboard after use

After use, push the switch to the OFF position. The USB receiver does not need to be pulled out from the terminal. You can use it next time directly.

## Charging the battery

The device uses built-in lithium-ion battery. Please use only approved USB cables and chargers.

**Note:** Fully charge the unit before initial operation. This device can be used when charging. But charging time will be extended. When the battery is low, the low-voltage light will blink to warn the user. The unit will be automatically turned off if the battery has been depleted.

## Scroll wheel function

Touchpad roller function: Two finger up and down sliding touchpad as mouse scroll function.

## Backlit

The Backlit LED will be automatically turned on for one second after the keyboard is being turned on. When the backlight is lighted, it will stay on

1 minute. If there is no operation after 1 minute, the backlight LED will be off automatically.



## Touchpad

The touchpad can be used in a horizontal or vertical position. To switch between horizontal or vertical mode, hold the Fn key and hit the "? /" key.



## Warning

- The attached USB cable just can be used for charging, it can not be used for data transfer.
- When charging finishes, pull out the charging cable.
- Never try to open or repair this product yourself.
- Keep this device away from fluids, such as water.

## Maintenance

- Do not attempt to disassemble the device or replace the rechargeable battery yourself.

- The battery will discharge when it is stored for a long time without operation.
- Use the specified charger. Disconnect the device when the battery is fully charged.
- Overcharging will shorten the battery life.

## Disposal



Always dispose the used appliance at a recycling center. Do not dispose the used appliance together with the household waste.

### Note:

Due to 2.4G wave technology adoption, the connection can be subject to interference from obstacles, like walls, metals, or other electronic devices. Please keep the space between the keyboard and USB receiver free of obstacle. In line with the policy of continued development, the manufacturer reserves the right to amend the specifications without prior notification. The illustrations in the user manual are for reference only. Please operate according to the real design.

THANKS FOR READING



Made in China